


ALL METAL HEAT PUMP HOSE

Check Box for Submitted Assembly Type

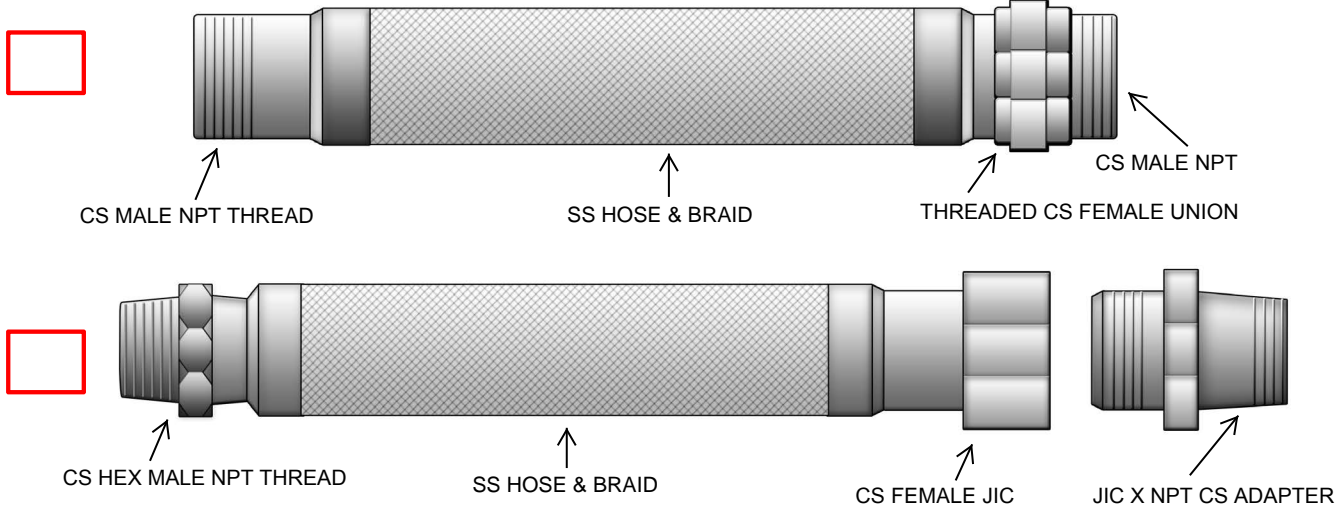

NOTE: STAINLESS STEEL END FITTINGS ARE AVAILABLE

| MAX TEMPERATURE WITH | |
|----------------------|--------|
| STAINLESS STEEL ENDS | 1250°F |
| CARBON STEEL ENDS | 800°F |

| QTY | SIZE | OVERALL LENGTH | WRK. PSIG | MAX TEST | @ TEMP. | LATERAL OFFSET |
|-----|--------|----------------|-----------|----------|---------|----------------|
| | 1/2" | | 796 | 1194 | 70°F | |
| | 3/4" | | 597 | 895 | 70°F | |
| | 1" | | 455 | 682 | 70°F | |
| | 1 1/4" | | 441 | 661 | 70°F | |
| | 1 1/2" | | 370 | 555 | 70°F | |
| | 2" | | 370 | 555 | 70°F | |

WHEN USED IN COPPER PIPING SYSTEMS STAINLESS STEEL OR BRASS NUT END FITTINGS MUST BE USED

BUY AMERICAN
ACT COMPLIANT

| TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG | | | | | | | | |
|--|--------|--------|--------|--------|--------|--------|--------|---------|
| 200° F | 250° F | 300° F | 350° F | 400° F | 500° F | 600° F | 700° F | 1500° F |
| 0.94 | 0.92 | 0.88 | 0.86 | 0.83 | 0.78 | 0.74 | 0.7 | 0.4 |

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: