


### MRCE

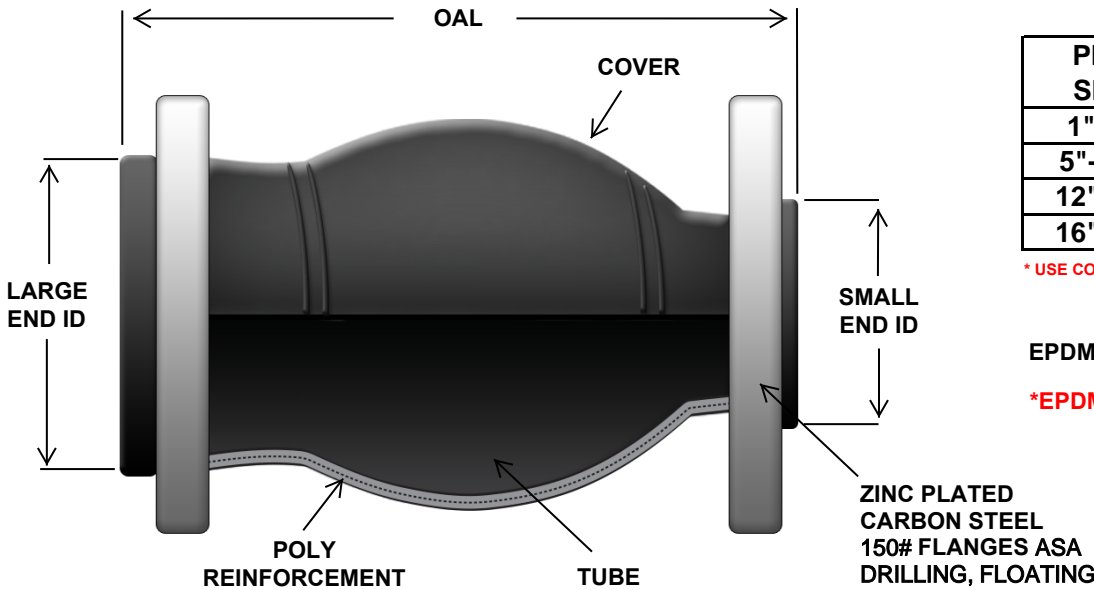

| PIPE SIZE | PSI |
|-----------|-----|
| 1" - 4"   | 180 |
| 5" - 10"  | 135 |
| 12" - 14" | 90  |
| 16" - 24" | 45  |

\* USE CONTROL RODS IF PSI IS AT OR EXCEEDS RATINGS IN CHART

EPDM Tube and Cover

\*EPDM acceptable for Lead Free



ZINC PLATED  
CARBON STEEL  
150# FLANGES ASA  
DRILLING, FLOATING

#### NOTES:

Max negative pressure 26" HG vacuum.  
Pressure rating is based on 170°F operating temperature. Minimum burst pressure is 4:1  
Angular movement is from a neutral position and can increase in conjunction with compression

| QTY | MODEL NUMBER | Large End ID | Small End ID | OAL | AXIAL COMP. | AXIAL EXT. | LATERAL DEFLECT | ANGLE DEGREE | WRK. PRESS |
|-----|--------------|--------------|--------------|-----|-------------|------------|-----------------|--------------|------------|
|     | MRCE0302     | 3"           | 2"           | 8"  | 1/2"        | 1/4"       | 1/2"            | 11.3°        | 200        |
|     | MRCE0325     | 3"           | 2 1/2"       | 8"  | 1/2"        | 1/4"       | 1/2"            | 10.3°        | 200        |
|     | MRCE0402     | 4"           | 2"           | 8"  | 1/2"        | 1/4"       | 1/2"            | 9.5°         | 200        |
|     | MRCE0403     | 4"           | 3"           | 8"  | 1/2"        | 1/4"       | 1/2"            | 8.1°         | 200        |
|     | MRCE0604     | 6"           | 4"           | 8"  | 1/2"        | 1/4"       | 1/2"            | 5.7°         | 190        |
|     | MRCE0804     | 8"           | 4"           | 8"  | 3/4"        | 3/8"       | 1/2"            | 7.1°         | 190        |
|     | MRCE0806     | 8"           | 6"           | 8"  | 3/4"        | 3/8"       | 1/2"            | 6.1°         | 190        |
|     | MRCE0108     | 10"          | 8"           | 8"  | 3/4"        | 3/8"       | 1/2"            | 4.8°         | 190        |

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: