


MRCE

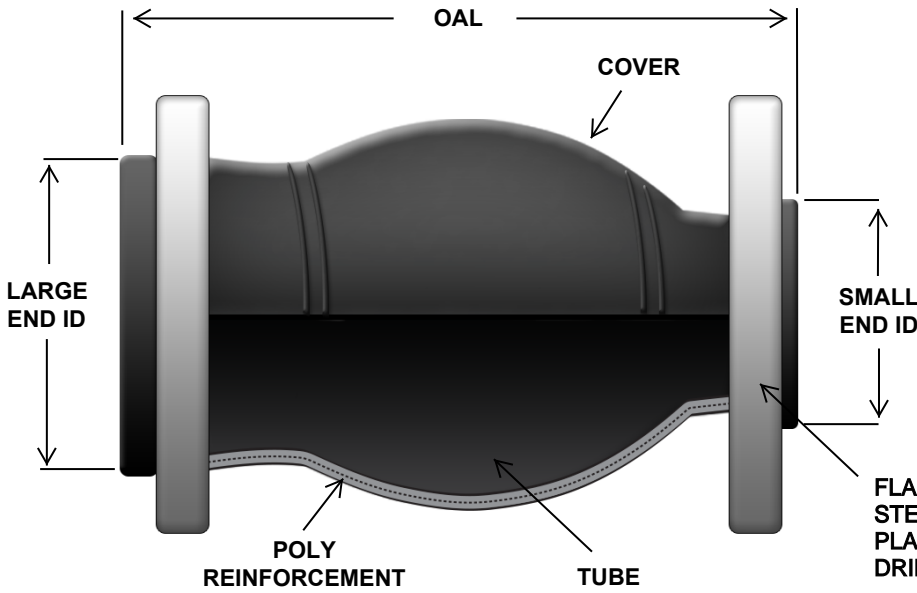

PIPE SIZE	PSI
1" - 4"	180
5" - 10"	135
12" - 14"	90
16" - 24"	45

* USE CONTROL RODS IF PSI IS AT OR EXCEEDS RATINGS IN CHART

EPDM Tube and Cover

*EPDM acceptable for Lead Free



FLANGES-PLATE
STEEL CADMIUM
PLATED 150# ASA
DRILLING, FLOATING

NOTES:

Max negative pressure 26" HG vacuum.
Pressure rating is based on 170°F operating temperature. Minimum burst pressure is 4:1
Angular movement is from a neutral position and can increase in conjunction with compression

QTY	MODEL NUMBER	Large End ID	Small End ID	OAL	AXIAL COMP.	AXIAL EXT.	LATERAL DEFLECT	ANGLE DEGREE	WRK. PRESS
	MRCE0302	3"	2"	8"	1/2"	1/4"	1/2"	11.3°	200
	MRCE0325	3"	2 1/2"	8"	1/2"	1/4"	1/2"	10.3°	200
	MRCE0402	4"	2"	8"	1/2"	1/4"	1/2"	9.5°	200
	MRCE0403	4"	3"	8"	1/2"	1/4"	1/2"	8.1°	200
	MRCE0604	6"	4"	8"	1/2"	1/4"	1/2"	5.7°	190
	MRCE0804	8"	4"	8"	3/4"	3/8"	1/2"	7.1°	190
	MRCE0806	8"	6"	8"	3/4"	3/8"	1/2"	6.1°	190
	MRCE0108	10"	8"	8"	3/4"	3/8"	1/2"	4.8°	190

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: