


TCHB - FFSC OPEN OAL



MATERIALS

- #1-2 HOSE & BRAID: BRONZE HOSE WITH 1-LAYER OF BRONZE BRAID
- #3 BRAID COLLAR: BRONZE
- #4 END FITTING: COPPER FEMALE SWEAT END

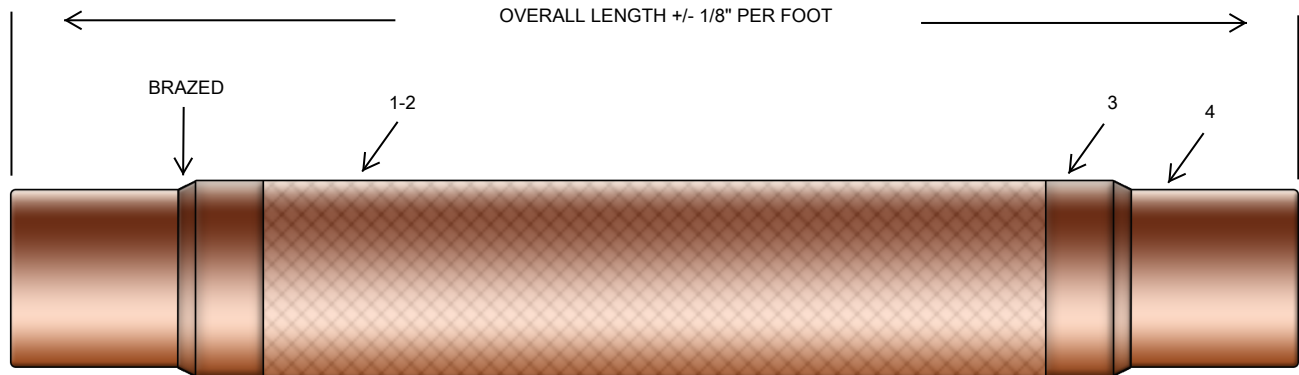

| QTY | MODEL NUMBER | SIZE | OVERALL LENGTH | WRK. PSIG | MAX TEST | @ TEMP. | LATERAL OFFSET |
|-----|-------------------|--------|----------------|-----------|----------|---------|----------------|
| | TCHB-025-FS-(OAL) | 1/4" | | 934 | 1401 | 70° F | |
| | TCHB-038-FS-(OAL) | 3/8" | | 704 | 1056 | 70° F | |
| | TCHB-050-FS-(OAL) | 1/2" | | 566 | 849 | 70° F | |
| | TCHB-075-FS-(OAL) | 3/4" | | 468 | 701 | 70° F | |
| | TCHB-100-FS-(OAL) | 1" | | 334 | 501 | 70° F | |
| | TCHB-125-FS-(OAL) | 1 1/4" | | 306 | 459 | 70° F | |
| | TCHB-150-FS-(OAL) | 1 1/2" | | 297 | 445 | 70° F | |
| | TCHB-200-FS-(OAL) | 2" | | 210 | 315 | 70° F | |
| | TCHB-250-FS-(OAL) | 2 1/2" | | 194 | 291 | 70° F | |
| | TCHB-300-FS-(OAL) | 3" | | 166 | 249 | 70° F | |
| | TCHB-400-FS-(OAL) | 4" | | 145 | 217 | 70° F | |

| TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG | | | | | | |
|--|--------|--------|--------|--------|--------|--|
| 150° F | 200° F | 250° F | 300° F | 350° F | 400° F | |
| 0.92 | 0.89 | 0.86 | 0.83 | 0.81 | 0.78 | |

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: