


TCHS - GRPF OPEN OAL



MATERIALS

- #1-2 HOSE & BRAID: STAINLESS STEEL HOSE WITH 1-LAYER OF STAINLESS STEEL BRAID
- #3 BRAID BAND: STAINLESS STEEL
- #4 END FITTING: SCH. 40 CARBON STEEL GROOVE
- #5 END FITTING: CARBON STEEL PLATE FLANGE 150# DRILL

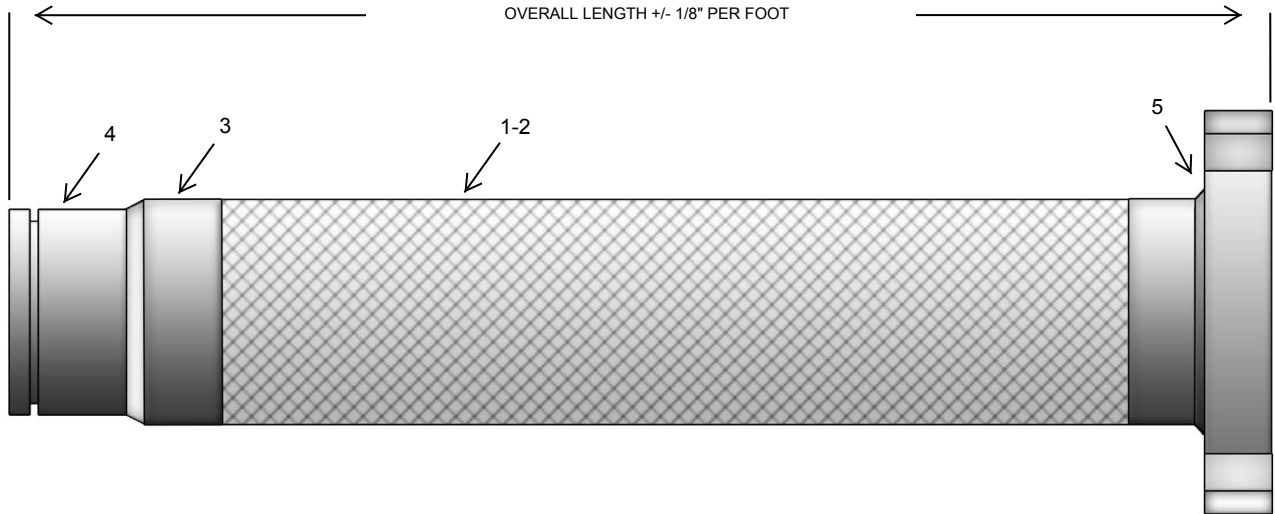

QTY	MODEL NUMBER	SIZE	OVERALL LENGTH	MAX O.D.	PRESSURE (PSIG)		TEMP °F	MOTION	
					OPER.	TEST		LATERAL	OTHER
	TCHS-200-GRPF-(OAL)	2"		6"	370	555	70° F		
	TCHS-250-GRPF-(OAL)	2 1/2"		7"	390	585	70° F		
	TCHS-300-GRPF-(OAL)	3"		7 1/2"	250	375	70° F		
	TCHS-400-GRPF-(OAL)	4"		9"	210	315	70° F		
	TCHS-500-GRPF-(OAL)	5"		10"	167	251	70° F		
	TCHS-600-GRPF-(OAL)	6"		11"	165	248	70° F		
	TCHS-800-GRPF-(OAL)	8"		13 1/2"	220	330	70° F		
	TCHS-1000-GRPF-(OAL)	10"		16"	175	263	70° F		
	TCHS-1200-GRPF-(OAL)	12"		19"	160	240	70° F		

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: