


### TCHS-SMMT OPEN (OAL)

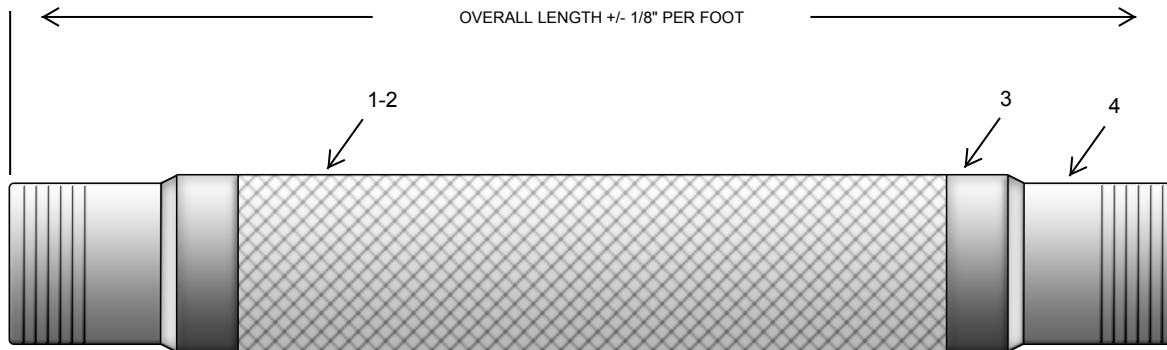

#### MATERIALS

#1-2 HOSE & BRAID:  STAINLESS STEEL HOSE WITH 1-LAYER OF STAINLESS STEEL BRAID

#3 BRAIDCOLLAR: STAINLESS STEEL

#4 END FITTING: SCH. 40 STAINLESS STEEL MALE NPT

QTY	MODEL NUMBER	SIZE	OPEN OAL	MAX O.D.	WRK. PSIG	MAX TEST	@ TEMP.	LATERAL OFFSET
	TCHS-025-SMMT-(OAL)	1/4"		.42"	2240	3360	70° F	
	TCHS-038-SMMT-(OAL)	3/8"		.62"	1100	1650	70° F	
	TCHS-050-SMMT-(OAL)	1/2"		.76"	796	1194	70° F	
	TCHS-075-SMMT-(OAL)	3/4"		1.03"	597	895	70° F	
	TCHS-100-SMMT-(OAL)	1"		1.32"	455	682	70° F	
	TCHS-125-SMMT-(OAL)	1 1/4"		1.63"	441	661	70° F	
	TCHS-150-SMMT-(OAL)	1 1/2"		1.91"	370	555	70° F	
	TCHS-200-SMMT-(OAL)	2"		2.46"	370	555	70° F	
	TCHS-250-SMMT-(OAL)	2 1/2"		3.1"	390	585	70° F	
	TCHS-300-SMMT-(OAL)	3"		3.86"	250	375	70° F	
	TCHS-400-SMMT-(OAL)	4"		4.95"	210	315	70° F	
	TCHS-500-SMMT-(OAL)	5"		6"	167	251	70° F	
	TCHS-600-SMMT-(OAL)	6"		7"	165	248	70° F	

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG							
200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: