


U LOOP GROOVE END 2"



MATERIALS

- #1-2 HOSE & BRAID: STAINLESS STEEL HOSE WITH 1-LAYER OF STAINLESS STEEL BRAID
- #3 BRAID BAND: STAINLESS STEEL
- #4 END FITTING: SCH. 40 CARBON STEEL GROOVE
- #5 ELBOWS: SCH. 40 CARBON STEEL
*12" ID AND LARGER ARE SCHEDULE STANDARD (STD)

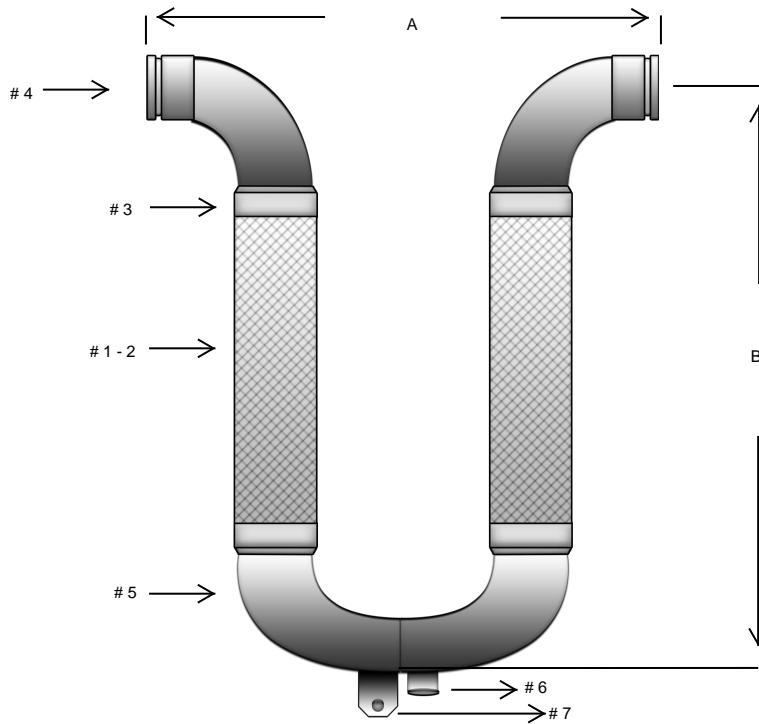

#6 PORT (OPTIONAL):

#7 HANGER (OPTIONAL):

QTY	MODEL #	SIZE	"A" DIM.	"B" DIM.	WRK. PSIG	MAX TEST	@ TEMP.	LATERAL OFFSET	WT. LBS.
	SL200762	2"	19 1/2"	22 1/2"	370	555	70°F	2"	13
	SL250762	2 1/2"	21 3/4"	23"	390	585	70°F	2"	22
	SL300762	3"	24"	25 3/4"	250	375	70°F	2"	30
	SL400762	4"	30"	31"	210	315	70°F	2"	51
	SL500762	5"	36"	38"	167	251	70°F	2"	82
	SL600762	6"	42"	41 1/2"	165	248	70°F	2"	126
	SL800762	8"	56"	53 1/4"	220	330	70°F	2"	254
	SL010762	10"	68"	61 3/4"	175	263	70°F	2"	429
	SL012762	*12"	80"	71"	160	240	70°F	2"	619

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG									
200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F	800° F	900° F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7	0.66	0.62

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: