


**U LOOP GROOVE END 4"**

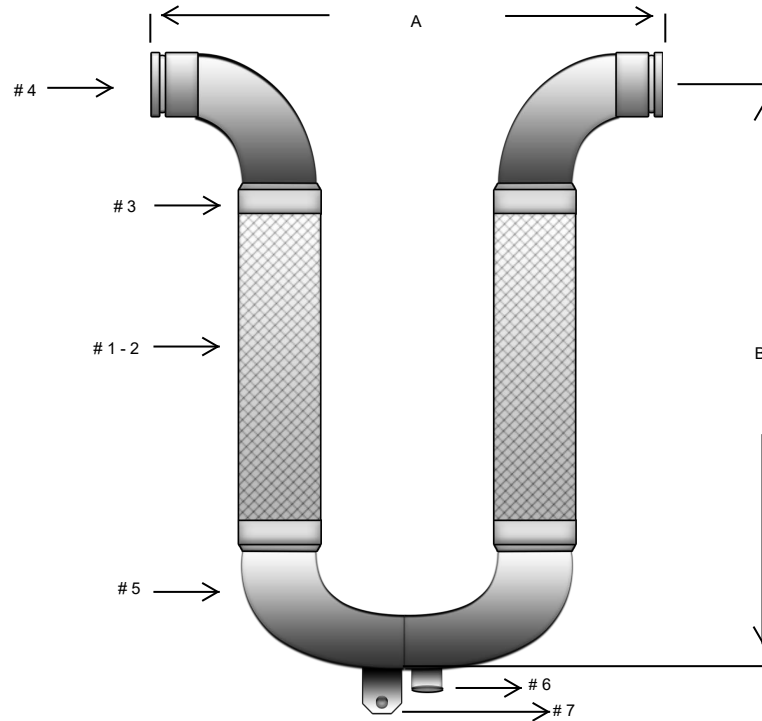

**MATERIALS**

#1-2 HOSE & BRAID: STAINLESS STEEL HOSE WITH 1-LAYER OF STAINLESS STEEL BRAID

#3 BRAID BAND: STAINLESS STEEL

#4 END FITTING: SCH. 40 CARBON STEEL GROOVE

#5 ELBOWS: SCH. 40 CARBON STEEL  
\*12" ID AND LARGER ARE SCHEDULE STANDARD (STD)

#6 PORT (OPTIONAL):

#7 HANGER (OPTIONAL):



QTY	MODEL #	SIZE	"A" DIM.	"B" DIM.	WRK. PSIG	MAX TEST	@ TEMP.	LATERAL OFFSET	WT. LBS.
	SL200764	2"	23 1/2"	28 1/2"	370	555	70°F	4"	13
	SL250764	2 1/2"	25 3/4"	28 1/4"	390	585	70°F	4"	22
	SL300764	3"	27 3/4"	31 1/2"	250	375	70°F	4"	30
	SL400764	4"	32"	37 1/4"	210	315	70°F	4"	51
	SL500764	5"	36 1/4"	45 3/4"	167	251	70°F	4"	82
	SL600764	6"	42"	49 1/4"	165	248	70°F	4"	126
	SL800764	8"	56"	62 3/4"	220	330	70°F	4"	254
	SL010764	10"	68"	72"	175	263	70°F	4"	429
	SL012764	*12"	80"	82 1/4"	160	240	70°F	4"	619

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG									
200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F	800° F	900° F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7	0.66	0.62

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: