


U LOOP MMT 2"

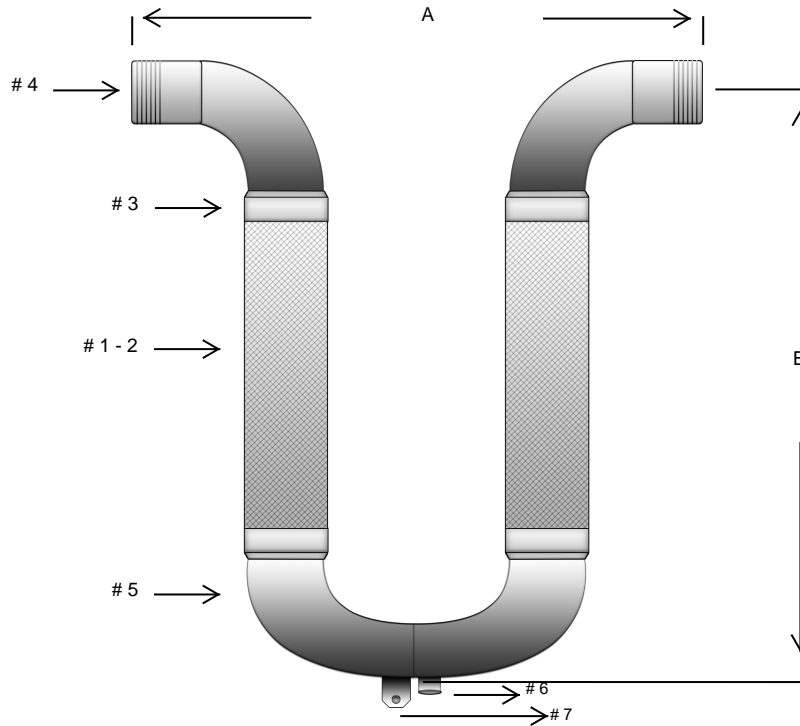

MATERIALS

#1-2 HOSE & BRAID: STAINLESS STEEL HOSE WITH 1-LAYER OF STAINLESS STEEL BRAID

#3 BRAID BAND: STAINLESS STEEL

#4 END FITTING: SCH. 40 CARBON STEEL MALE NPT

#5 ELBOWS: SCH. 40 CARBON STEEL

#6 PORT (OPTIONAL):

#7 HANGER (OPTIONAL):



QTY	MODEL #	SIZE	"A" DIM.	"B" DIM.	WRK. PSIG	MAX TEST	@ TEMP	LATERAL OFFSET	WT. LBS.
	SL050012	1/2"	15"	12 1/4"	796	1194	70°F	2"	2
	SL075012	3/4"	14 1/2"	13 1/2"	597	895	70°F	2"	2.5
	SL100012	1"	15 1/2"	14 3/4"	455	682	70°F	2"	4.5
	SL125012	1 1/4"	16 1/2"	17 1/4"	441	661	70°F	2"	6
	SL150012	1 1/2"	17 1/2"	19 1/4"	370	555	70°F	2"	9
	SL200012	2"	19 1/2"	22 1/2"	370	555	70°F	2"	13
	SL250012	2 1/2"	21 3/4"	23"	390	585	70°F	2"	22
	SL300012	3"	24"	25 3/4"	250	375	70°F	2"	30

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG									
200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F	800° F	900° F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7	0.66	0.62

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: