


## U LOOP MALE 4"



### MATERIALS

- #1-2 HOSE & BRAID: STAINLESS STEEL HOSE WITH 1-LAYER OF STAINLESS STEEL BRAID
- #3 BRAID BAND: STAINLESS STEEL
- #4 END FITTING: SCH. 40 CARBON STEEL MALE NPT
- #5 ELBOWS: SCH. 40 CARBON STEEL

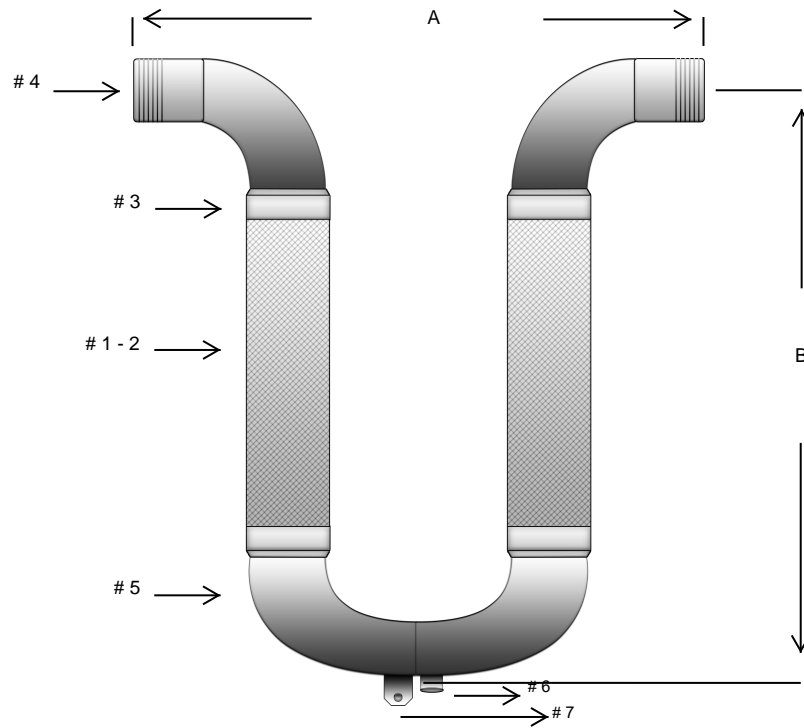

#6 PORT (OPTIONAL):

#7 HANGER (OPTIONAL):

QTY	MODEL #	SIZE	"A" DIM.	"B" DIM.	WRK. PSIG	MAX TEST	@ TEMP.	LATERAL OFFSET	WT. LBS.
	SL050014	1/2"	19"	15 3/4"	796	1194	70°F	4"	2
	SL075014	3/4"	18 1/2"	17 1/2"	597	895	70°F	4"	2.5
	SL100014	1"	19 1/2"	19"	455	682	70°F	4"	4.5
	SL125014	1 1/4"	20 1/2"	22"	441	661	70°F	4"	6
	SL150014	1 1/2"	21 1/2"	24 3/4"	370	555	70°F	4"	9
	SL200014	2"	23 1/2"	28 1/2"	370	555	70°F	4"	13
	SL250014	2 1/2"	25 3/4"	28 1/4"	390	585	70°F	4"	22
	SL300014	3"	27 3/4"	31 1/2"	250	375	70°F	4"	30

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG									
200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F	800° F	900° F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7	0.66	0.62

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: