


### V90 GROOVE 4"

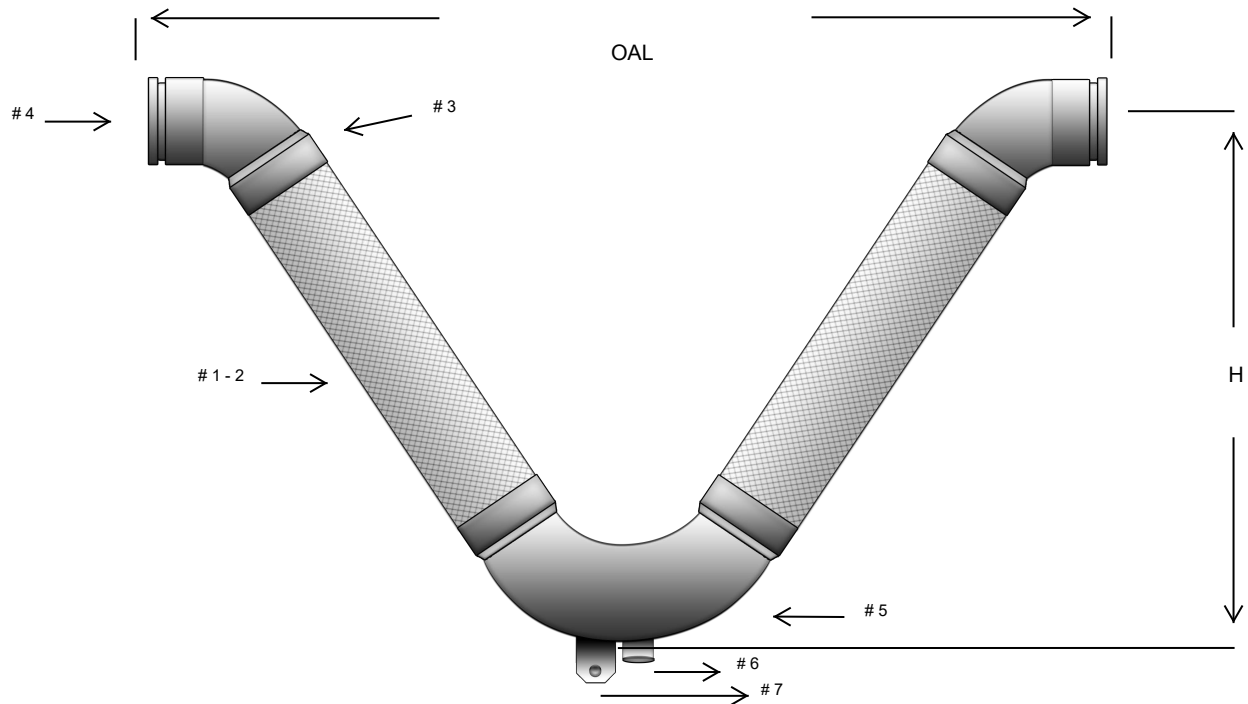

**MATERIALS**

#1-2 HOSE & BRAID: STAINLESS STEEL HOSE WITH 1-LAYER OF STAINLESS STEEL BRAID

#3 BRAID COLLAR: STAINLESS STEEL

#4 END FITTING: SCH.40 CARBON STEEL GROOVE

#5 ELBOWS: SCH. 40 CARBON STEEL  
 \*12" ID AND LARGER ARE SCHEDULE STANDARD (STD)

#6 PORT (OPTIONAL):

#7 HANGER (OPTIONAL):



QTY	MODEL NUMBER	SIZE	OAL DIM.	"H" DIM.	WRK. PSIG	MAX TEST	MOTION X,Y,Z	WT. LBS.
	SV200764	2"	45 1/4"	18 1/4"	370	555	4"	15
	SV250764	2 1/2"	44 3/4"	17 1/2"	390	585	4"	22
	SV300764	3"	49"	19 1/4"	250	375	4"	29
	SV400764	4"	56"	22"	210	315	4"	47
	SV500764	5"	67 1/4"	27"	167	251	4"	64
	SV600764	6"	71 1/2"	28 1/2"	165	248	4"	102
	SV800764	8"	91 1/4"	35 3/4"	220	330	4"	215
	SV010764	10"	103"	40"	175	263	4"	360
	SV012764	*12"	116"	45 1/4"	160	240	4"	495

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG									
200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F	800° F	900° F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7	0.66	0.62

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: