


### V90 MMT 2"

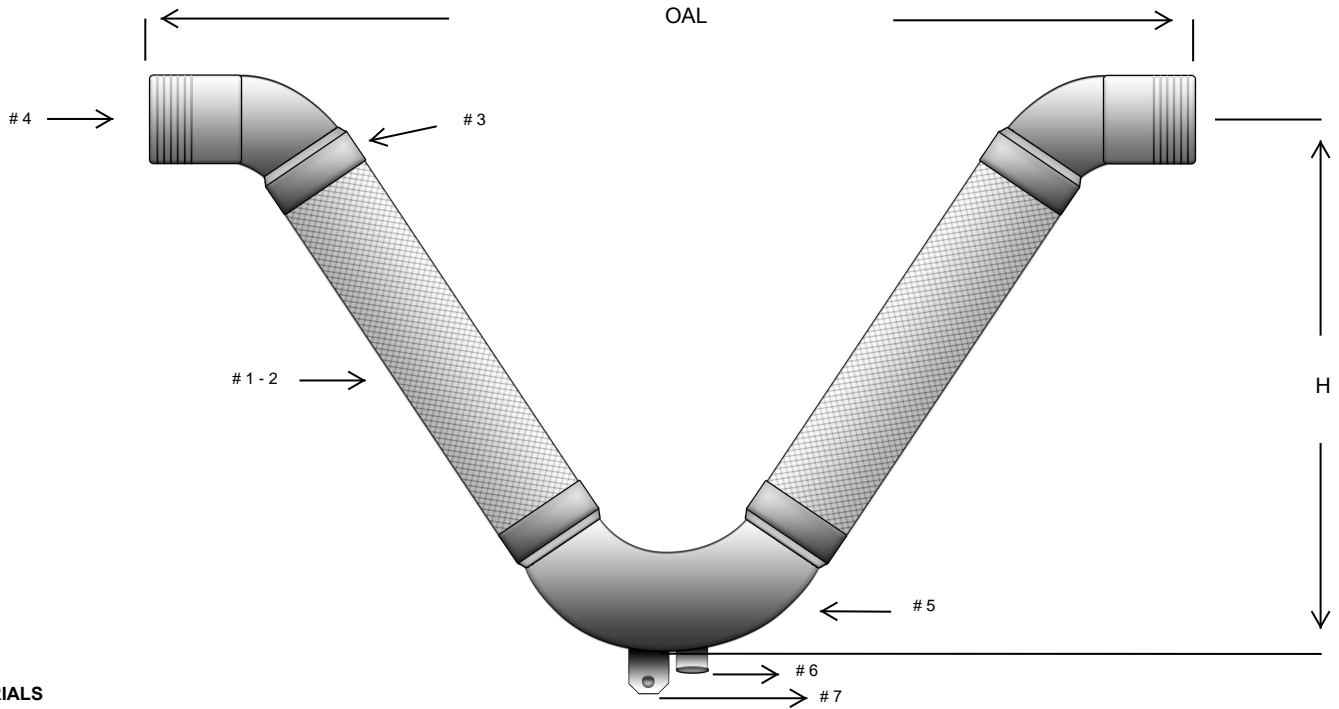

**MATERIALS**

#1-2 HOSE & BRAID: STAINLESS STEEL HOSE WITH 1-LAYER OF STAINLESS STEEL BRAID

#3 BRAID COLLAR: STAINLESS STEEL

#4 END FITTING: SCH. 40 CARBON STEEL MALE NPT

#5 ELBOWS: SCH. 40 CARBON STEEL

#6 PORT (OPTIONAL):

#7 HANGER (OPTIONAL):



QTY	MODEL NUMBER	SIZE	OAL DIM.	"H" DIM.	WRK. PSIG	MAX TEST	MOTION X,Y,Z	WT. LBS.
	SV050012	1/2"	23"	7 1/2"	796	1194	2"	2
	SV075012	3/4"	24 1/2"	8 3/4"	597	895	2"	3
	SV100012	1"	27"	9 3/4"	455	682	2"	5
	SV125012	1 1/4"	30"	11"	441	661	2"	7
	SV150012	1 1/2"	32 3/4"	12 1/4"	370	555	2"	9
	SV200012	2"	36 3/4"	14"	370	555	2"	15
	SV250012	2 1/2"	37 1/2"	13 3/4"	390	585	2"	25
	SV300012	3"	40 3/4"	15 1/4"	250	375	2"	30

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG									
200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F	800° F	900° F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7	0.66	0.62

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: