


### TCHB - CHMMT OPEN OAL



#### MATERIALS

- #1-2 HOSE & BRAID: BRONZE HOSE WITH 1-LAYER OF BRONZE BRAID
- #3 BRAID COLLAR: BRONZE
- #4 END FITTING: COPPER HEX MALE NPT

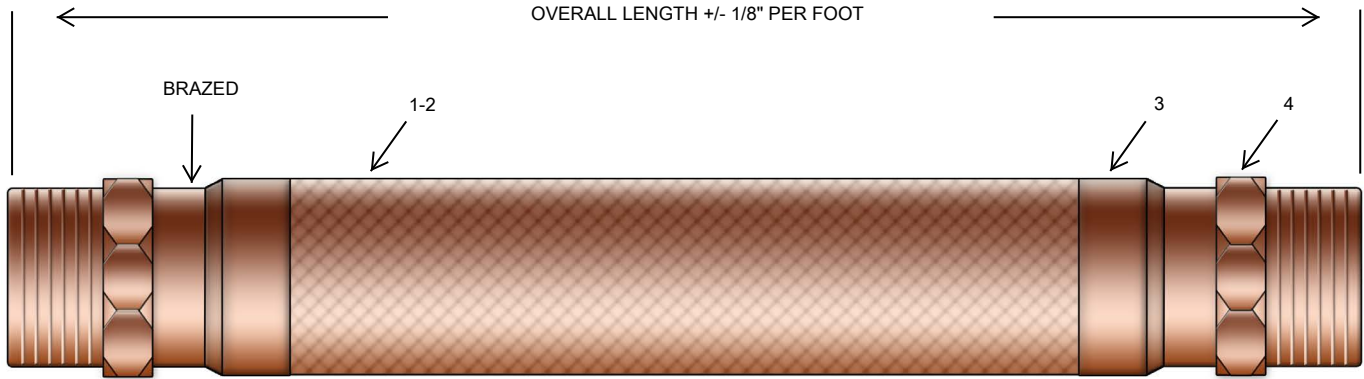

QTY	MODEL NUMBER	SIZE	OVERALL LENGTH	WRK. PSIG	MAX TEST	@ TEMP.	LATERAL OFFSET
	TCHB-025-CHMMT-(OAL)	1/4"		934	1401	70° F	
	TCHB-038-CHMMT-(OAL)	3/8"		704	1056	70° F	
	TCHB-050-CHMMT-(OAL)	1/2"		566	849	70° F	
	TCHB-075-CHMMT-(OAL)	3/4"		468	701	70° F	
	TCHB-100-CHMMT-(OAL)	1"		334	501	70° F	
	TCHB-125-CHMMT-(OAL)	1 1/4"		306	459	70° F	
	TCHB-150-CHMMT-(OAL)	1 1/2"		297	445	70° F	
	TCHB-200-CHMMT-(OAL)	2"		210	315	70° F	
	TCHB-250-CHMMT-(OAL)	2 1/2"		194	291	70° F	
	TCHB-300-CHMMT-(OAL)	3"		166	249	70° F	
	TCHB-400-CHMMT-(OAL)	4"		145	217	70° F	

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG					
150° F	200° F	250° F	300° F	350° F	400° F
0.92	0.89	0.86	0.83	0.81	0.78

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: