


TCHS - FLG

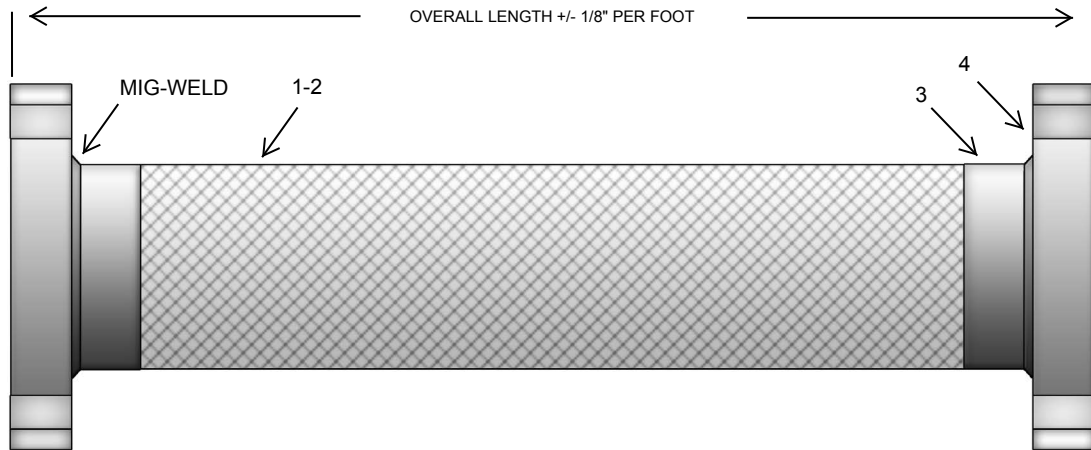

MATERIALS

#1-2 HOSE & BRAID: STAINLESS STEEL HOSE WITH 1-LAYER OF STAINLESS STEEL BRAID

#3 BRAID BAND: STAINLESS STEEL

#4 END FITTING: CARBON STEEL PLATE FLANGES 150# DRILL



QTY	MODEL NUMBER	SIZE	OAL	MAX O.D.	WRK. PSIG	MAX TEST	@ TEMP.	LATERAL OFFSET	WT. LBS.
	TCHS-150-FLG	1 1/2"	9"	1.91"	370	555	70° F	1/16"	7
	TCHS-200-FLG	2"	9"	2.46"	370	555	70° F	1/16"	9
	TCHS-250-FLG	2 1/2"	9"	3.12"	390	585	70° F	1/16"	12
	TCHS-300-FLG	3"	9"	3.86"	250	375	70° F	1/16"	13
	TCHS-400-FLG	4"	9"	4.95"	210	315	70° F	1/16"	18
	TCHS-500-FLG	5"	11"	6.03"	167	251	70° F	1/16"	25
	TCHS-600-FLG	6"	11"	7.19"	165	248	70° F	1/16"	28
	TCHS-800-FLG	8"	12"	9.31"	220	330	70° F	1/16"	52
	TCHS-1000-FLG	10"	13"	11.49"	175	263	70° F	1/16"	65
	TCHS-1200-FLG	12"	14"	13.51"	160	240	70° F	1/16"	105
	TCHS-1400-FLG	14"	14"	16.71"	110	165	70° F	1/16"	115
	TCHS-1600-FLG	16"	14"	16.62"	110	165	70° F	1/16"	235

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG									
200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F	800° F	900° F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7	0.66	0.62

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: