


U LOOP FLANGE 2"

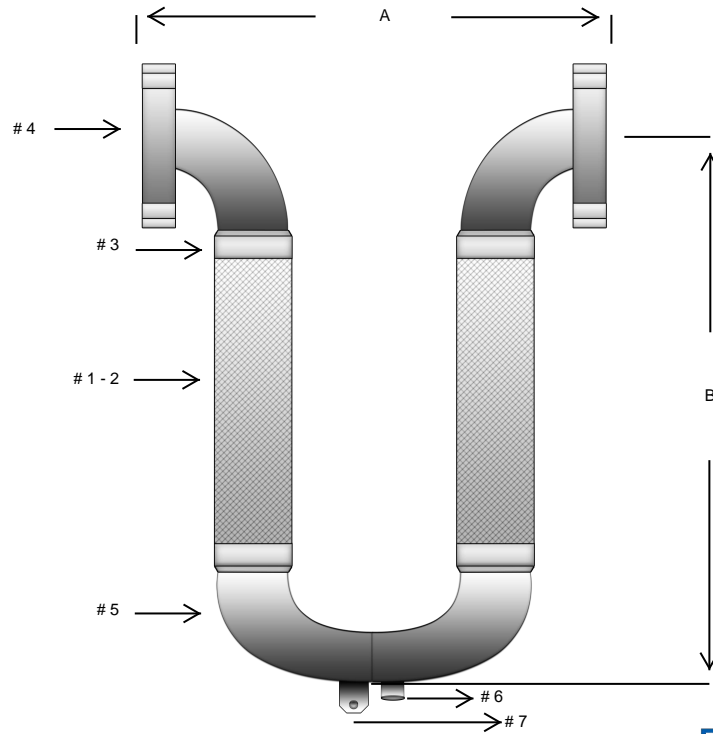

MATERIALS

#1-2 HOSE & BRAID: STAINLESS STEEL HOSE WITH 1-LAYER OF STAINLESS STEEL BRAID

#3 BRAID BAND: STAINLESS STEEL

#4 END FITTING: CARBON STEEL PLATE FLANGE

#5 ELBOWS: SCH. 40 CARBON STEEL

*12" ID AND LARGER ARE SCHEDULE STANDARD (STD)

#6 PORT (OPTIONAL):

#7 HANGER (OPTIONAL):



QTY	MODEL #	SIZE	"A" DIM.	"B" DIM.	WRK. PSIG	MAX TEST	@ TEMP.	LATERAL OFFSET	WT. LBS.
	SL200482	2"	14"	22 1/2"	370	555	70°F	2"	19
	SL250482	2 1/2"	16 1/4"	23"	390	585	70°F	2"	30
	SL300482	3"	18 1/2"	25 3/4"	250	375	70°F	2"	38
	SL400482	4"	24 1/2"	31"	210	315	70°F	2"	61
	SL500482	5"	30 1/2"	38"	167	251	70°F	2"	96
	SL600482	6"	36 1/2"	41 1/2"	165	248	70°F	2"	139
	SL800482	8"	48 1/2"	53 1/4"	220	330	70°F	2"	280
	SL010482	10"	60 1/2"	61 3/4"	175	263	70°F	2"	455
	SL012482	*12"	72 1/2"	71"	160	240	70°F	2"	668

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG									
200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F	800° F	900° F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7	0.66	0.62

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: