


U LOOP GROOVE END 3"



MATERIALS

- #1-2 HOSE & BRAID: STAINLESS STEEL HOSE WITH 1-LAYER OF STAINLESS STEEL BRAID
- #3 BRAID BAND: STAINLESS STEEL
- #4 END FITTING: SCH. 40 CARBON STEEL GROOVE
- #5 ELBOWS: SCH. 40 CARBON STEEL
*12" ID AND LARGER ARE SCHEDULE STANDARD (STD)

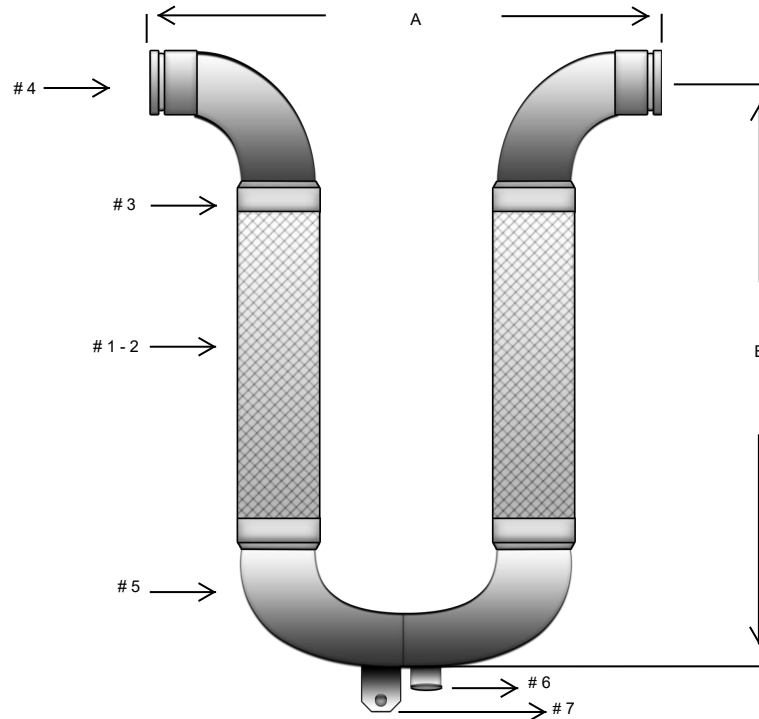

#6 PORT (OPTIONAL):

#7 HANGER (OPTIONAL):

QTY	MODEL #	SIZE	"A" DIM.	"B" DIM.	WRK. PSIG	MAX TEST	@ TEMP.	LATERAL OFFSET	WT. LBS.
	SL200763	2"	21 1/2"	25 3/4"	370	555	70°F	3"	13
	SL250763	2 1/2"	23 3/4"	25 3/4"	390	585	70°F	3"	22
	SL300763	3"	25 3/4"	28 3/4"	250	375	70°F	3"	30
	SL400763	4"	30"	34 1/4"	210	315	70°F	3"	51
	SL500763	5"	36"	42 1/4"	167	251	70°F	3"	82
	SL600763	6"	42"	45 3/4"	165	248	70°F	3"	126
	SL800763	8"	56"	58 1/2"	220	330	70°F	3"	254
	SL010763	10"	68"	67 1/4"	175	263	70°F	3"	429
	SL012763	*12"	80"	77"	160	240	70°F	3"	619

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG									
200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F	800° F	900° F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7	0.66	0.62

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: